226893
COVERALL

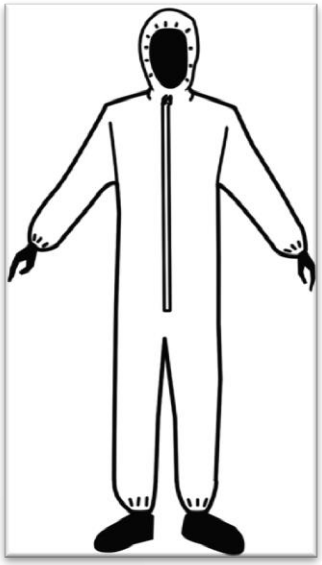

Description: Latex free, low linting coverall for use in many critical and industrial environments. High filtration fabric holds out 98.8% of particles at 3 microns, and also provides excellent splash protection from many fluids. Features include an attached hood, zipper front entry, elastic wrists, elastic ankles, elastic lower back, and a storm flap zipper cover.

Fabric Info: Fabric is constructed from a laminated three layer non-woven fabric that contains a high filtration center layer.

Individually inspected for sizing, stitching and workmanship.

Material Weight: 60gm/m2

General Info:	ISO Class:	6 / Helmke Drum Testing	IEST-RP-CC003.3
	Sizing:		ANSI/ISEA 101-1996
	Flammability:	Class 1	CPSC 1610
Test Results:	Grab Strength:	MD: 18 lbs, XD: 14 lbs	ASTM D751
	Ball Burst:	20.3 lbs ASTM	D3787
	Puncture/Tear	MD: 4.2 lbs, XD: 5.3 lbs	ASTM D2582
	Hydrohead:	121”	AATC 127-1998
	Water Vapor Transmission: 5000 g/m2, 90F & RH50%		ASTM E96-80

Color: White

Sizes: L – 6XL

Packaging: Neatly folded and packed 25 pieces per sealed inner polybag.