

PRODUCT INFORMATION




DuPont™ Tyvek® IsoClean® Coverall. Designed for controlled environments with excellent barrier to particles, microorganisms, and non-hazardous liquids. Clean-processed and sterile, white coverall features a bound neck, dolman sleeve design, covered elastic wrists and ankles, a zipper closure, bound seams, and a pin lock slider zipper pull. Suitable for cleanroom applications in pharmaceutical, biotech, medical device manufacturing, and laboratory settings.

[Certificates of Sterility Available Here](#)

ATTRIBUTES

| | |
|------------------|---|
| Full Part Number | IC253BWHxx0025yy (xx=size) [?] |
| Fabric/Materials | Tyvek® IsoClean® |
| Design | Coverall (all) |
| Seam | Bound |
| Color | White |
| Quantity/Box | 25 per case |
| Sizes | SM, MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X |
| Option Codes | CS |

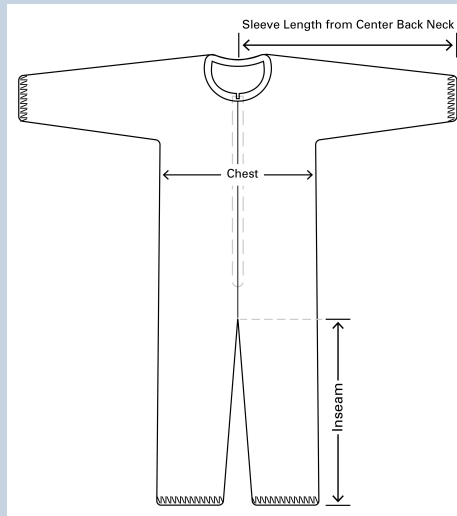

SIZE TABLE

| SIZE | SLEEVE LENGTH | CHEST WIDTH | INSEAM | FITS CHEST | FITS HEIGHT |
|------|---------------|-------------|--------|-----------------|--------------|
| SM | 34 1/4 | 22 1/2 | 29 1/4 | 31 3/4 - 35 1/4 | 5'0" - 5'7" |
| MD | 35 1/2 | 23 1/2 | 30 1/2 | 33 3/4 - 37 1/4 | 5'3" - 5'7" |
| LG | 36 3/4 | 24 1/4 | 32 1/4 | 35 1/4 - 38 3/4 | 5'5" - 5'9" |
| XL | 38 1/4 | 26 1/2 | 33 1/2 | 39 3/4 - 43 1/4 | 5'8" - 6'2" |
| 2X | 39 3/4 | 28 1/2 | 34 | 43 3/4 - 47 1/4 | 6'0" - 6'4" |
| 3X | 40 3/4 | 30 1/2 | 35 | 47 3/4 - 51 1/4 | 6'2" - 6'4" |
| 4X | 42 1/4 | 32 1/4 | 38 | 51 1/4 - 54 3/4 | 6'4" - 6'7" |
| 5X | 42 1/2 | 34 1/4 | 37 1/2 | 55 1/4 - 58 3/4 | 6'7" - 6'10" |
| 6X | 42 3/4 | 36 1/4 | 37 | 59 1/4 - 62 3/4 | 6'9" - 7'1" |
| 7X | 43 | 38 1/4 | 36 1/2 | 63 1/4 - 66 3/4 | 7'0" - 7'4" |



PHYSICAL PROPERTIES

| PROPERTY | TEST METHOD | TYPICAL RESULT | STDDEV |
|--|-----------------|-------------------------|-------------------------|
| Basis Weight | ASTM D3776 | 1.33 oz/yd ² | 0.06 oz/yd ² |
| Burst Strength - Mullen | ASTM D774 | 44 psi | 7 psi |
| Breaking Strength - Grab (MD) | ASTM D5034 | 14 lb _f | 2 lb _f |
| Breaking Strength - Grab (CD) | ASTM D5034 | 20 lb _f | 3 lb _f |
| Particle Shedding (Helmke Drum) | IEST-RP-CC003.3 | Category I | |
| Bacterial Filtration Efficiency (3.0 micron) | ASTM F2101 | 98.4% | 0.9% |
| Hydrostatic Head | AATCC 127 | 74 cm H ₂ O | 10 cm H ₂ O |
| Wearing Apparel Flammability | 16 CFR 1610 | Class 1 | |

WARNING

As of January 2023, all DuPont Personal Protection products are manufactured under specifications that exclude components containing natural rubber latex. Tyvek® 500, Tyvek® 600 and Tyvek® 800 styles made before January 2023 contain natural rubber latex, which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products and should report it to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.


CLEANROOM WARNINGS

Warning: Cleanroom apparel should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Cleanroom fabrics should have slip-resistant materials on the outer sole of boots, shoe covers, or other garment surfaces in conditions where slipping could occur. Silicone Statement: All DuPont Personal Protection products are manufactured under specifications that do not contain silicone, with some exceptions. Tyvek® friction-coated shoe covers or Tyvek® garments with friction-coated shoe covers might contain silicone. This includes styles TY122, TY121, FC450 and FC454. Tychem® 6000 AL styles TF630 and TF640T contain a silicone valve diaphragm. End users who are consuming these styles and who have concerns about silicone contamination should conduct their own testing to ensure they are suitable for their application(s). Latex statement: As of January 2023, all DuPont Personal Protection products are manufactured under specifications that exclude components containing natural rubber latex. Tyvek® 500, Tyvek® 600 and Tyvek® 800 styles made before January 2023 contain natural rubber latex, which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products and should report it to DuPont at +1 (888) 439-2988 so that an investigation can be initiated. As of January 2023, Tyvek® 500, Tyvek® 600 and Tyvek® 800 are manufactured under specifications that exclude components containing natural rubber latex.

Anyone who begins to exhibit allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at 1.800.441.3637.

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical and controlled environment hazards.



[DuPont Personal Protection SafeSPEC™](#)

[in DuPont Personal Protection](#)

[DuPont Personal Protection](#)

CREATED ON: FEBRUARY 27, 2026